



Mat.: 1.2344  
Hardened  $53 \pm 2$  HRC.  
Patented System

## Compact Coring Unit Unidad Apriete Kompakt Kernstifthalter Unità Compatta di Punzonatura Unidade de Aperto Butée de Broche

● Cad Insertion Point


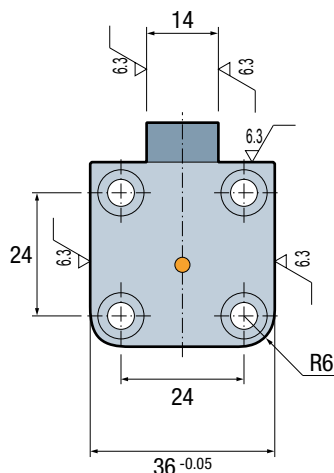


### IMPORTANT

Option for machining keyway.  
Posibilidad de mecanizado anti giro.  
Möglichkeit zur Herstellung einer Aussparung.  
Possibilità di lavorazione anti giro.  
Possibilidade de maquinar anti-rotação.  
Possibilit  d'indexer la broche.





### IMPORTANT

Standard stroke of 4mm.  
Recorrido est ndar de 4mm.  
Standard Hub 4mm.  
Cursa del asta 4mm.  
Curso standard de 4mm.  
Course standard de 4mm.

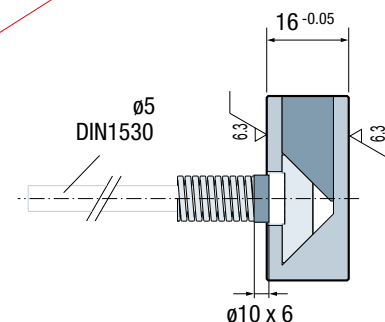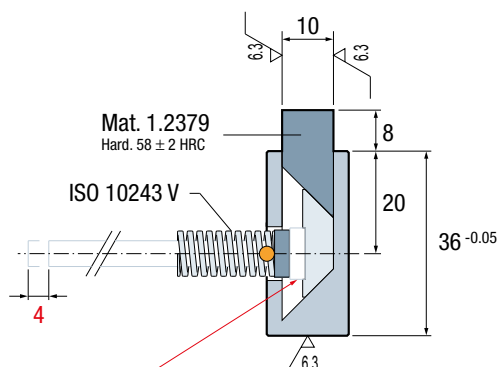

### Ref.

UA.363616

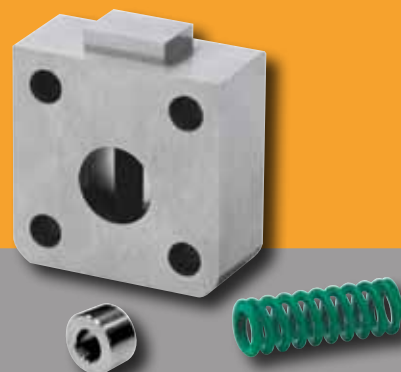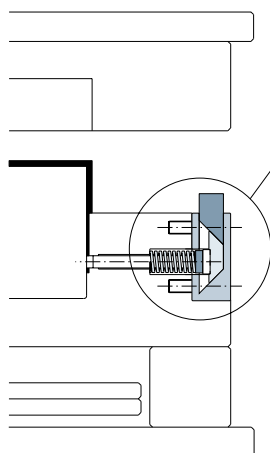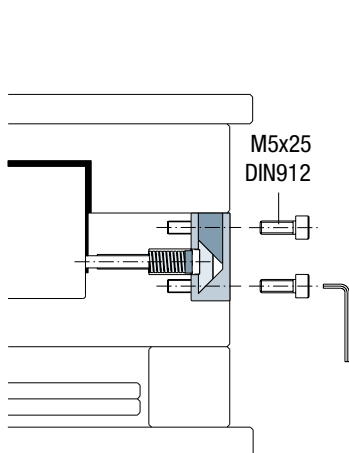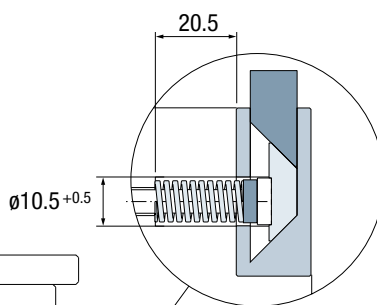

### EN

Reduces costs in machining and fitting.  
Reduces mould production time.  
Machining for installation is easier due to always being at 90° to parting line.  
Less space required compared to conventional solutions.  
Offers a standard solution to the mold.

### ES

Reducci n de costes en mecanizado y ajustes.  
Reducci n en la fabricaci n del molde.  
Todos los mecanizados son a 90  de la l nea de parti n.  
Ocupa un menor espacio que las soluciones convencionales.  
Ofrece una soluci n est ndar al inyector.

### DE

Kosteng nstig in Bearbeitung und Einbau.  
Reduziert Herstellungszeit.  
Die Bearbeitung f r den Anbau ist einfach, da Herstellung unter 90  von der Trennebene.  
Platzsparende Variante.  
Bietet dem Formenbauer eine einfache und kosteng nstige L sung.

### IT

Riduzioni dei costi per le lavorazioni e per l'aggiustaggio.  
Diminuzione dei tempi di fabbricazione dello stampo.  
Tutte le lavorazioni sono a 90  rispetto alla linea di partizione dello stampo.  
Occupa minor spazio rispetto ai metodi convenzionali.  
Offre una soluzione standard allo stampatore.

### PT

Reduz custos em maquina  o e ajustes.  
Reduz tempos de fabrica   o.  
Todas as maquina   es s  o a 90  em rela   o   Linha de Junta.  
Ocupa menos espa  o em rela   o a sistemas convencionais.  
Oferece um produto standard ao moldador.

### FR

R duit les co  ts d'ajustages et de pr parations.  
R duit le d lai de r alisation.  
Usinage   90  : 2D.  
Faible encombrement par rapport   des syst mes traditionnels.  
Offre un produit standard au mouliste.